

AmTopp - TD BOPP

Matte Finished, Non-Sealable

Description

AmTopp TD Film is a co-extruded, non-sealable, one side matte, one side treated, biaxially oriented film.

Features

Non-heat sealable

Very good stiffness

Very good flatness

One side matte finish

Excellent bond strengths with inks, adhesives, and cold seals

Available one side high energy treated on the glossy surface; no back-side treat into matte finish


Markets

Industrial or tape applications requiring a matte finish

Over laminate for graphic arts

Matte Labels

Matte laminations (non-sealable)

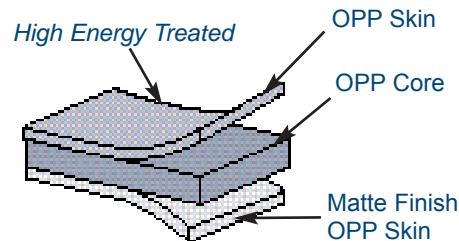

AmTopp - World of Films

Basic Physical Properties

Physical Properties	Test Method	Unit	Typical Value
Haze	ASTM D1003-61	%	75
Gloss (45°)	ASTM D2457-77	G.U.	matte face 10 gloss face 50
Tensile Strength	ASTM D882	PSI	MD 20,000 TD 32,000
Elongation	ASTM D882	%	MD 140 TD 60
Shrinkage	5min., 266°F (air oven)	%	MD < 5 TD < 3

Available Gauges & Typical Values

	TD18	TD25	TD30
Thickness (mils)	0.7	0.97	1.19
Yield (sq in/lb)	43,400	31,400	25,700