

MODEL FP2108P

PORTABLE FILTRATION SYSTEM



High Performance Filtration for Today's Industry

360 GPH

APPLICATIONS

**Hydraulic Oil • Compressor Oil • Quench Oil
EDM Oil • Lubricating Oil • Insulating Oil
Turbine Oil • Gear Oil • Water Glycol Fluids
Water Based Coolants**

SPECIFICATIONS

- 3/4 HP TEFC Heavy Duty Motor with Thermal Overload Protection.
- 8 GPM Positive Displacement Gear Pump with Internal Relief Valve.
- Two (2) Polyurethane Powder Baked F1000 Element Housings.
- Wired 110 Volt, 1 Phase with all electrical components mounted in a NEMA 4 enclosure.
- Automatic High/Low Pressure Shutdown System for unattended operation.
- 0-100 PSI Glycerin Filled Gauge for monitoring system pressure.
- Plumbed with 3/4" fittings and 1" stainless steel tubing.
- 3/4" inlet and 3/4" outlet with ball valves provided to isolate unit for element change.
- Two (2) 15 ft. 3/4" inlet and outlet hydraulic hoses with hose ends.
- Fifteen (15) feet of Heavy Duty 12/3 Power Cable.
- Manufactured with 3-way ball valve for Fluid Transfer System and to allow for adding makeup oil.
- Suction-Wye Strainer to protect pump from large debris.
- Heavy-Duty 10" Pneumatic Tires.
- Filtration Capacity of 6.5 GPM and Fluid Transfer Capacity of 8 GPM.



REDUCE MAINTENANCE, EXTEND OIL AND EQUIPMENT LIFE

REDUCING YOUR COSTS TODAY TO INCREASE YOUR PROFITS TOMORROW


MODEL FP2108P

PORTABLE FILTRATION SYSTEM



Portable Oil Filtration System for Lubricating Oils and Fluid Power Systems

360 GPH

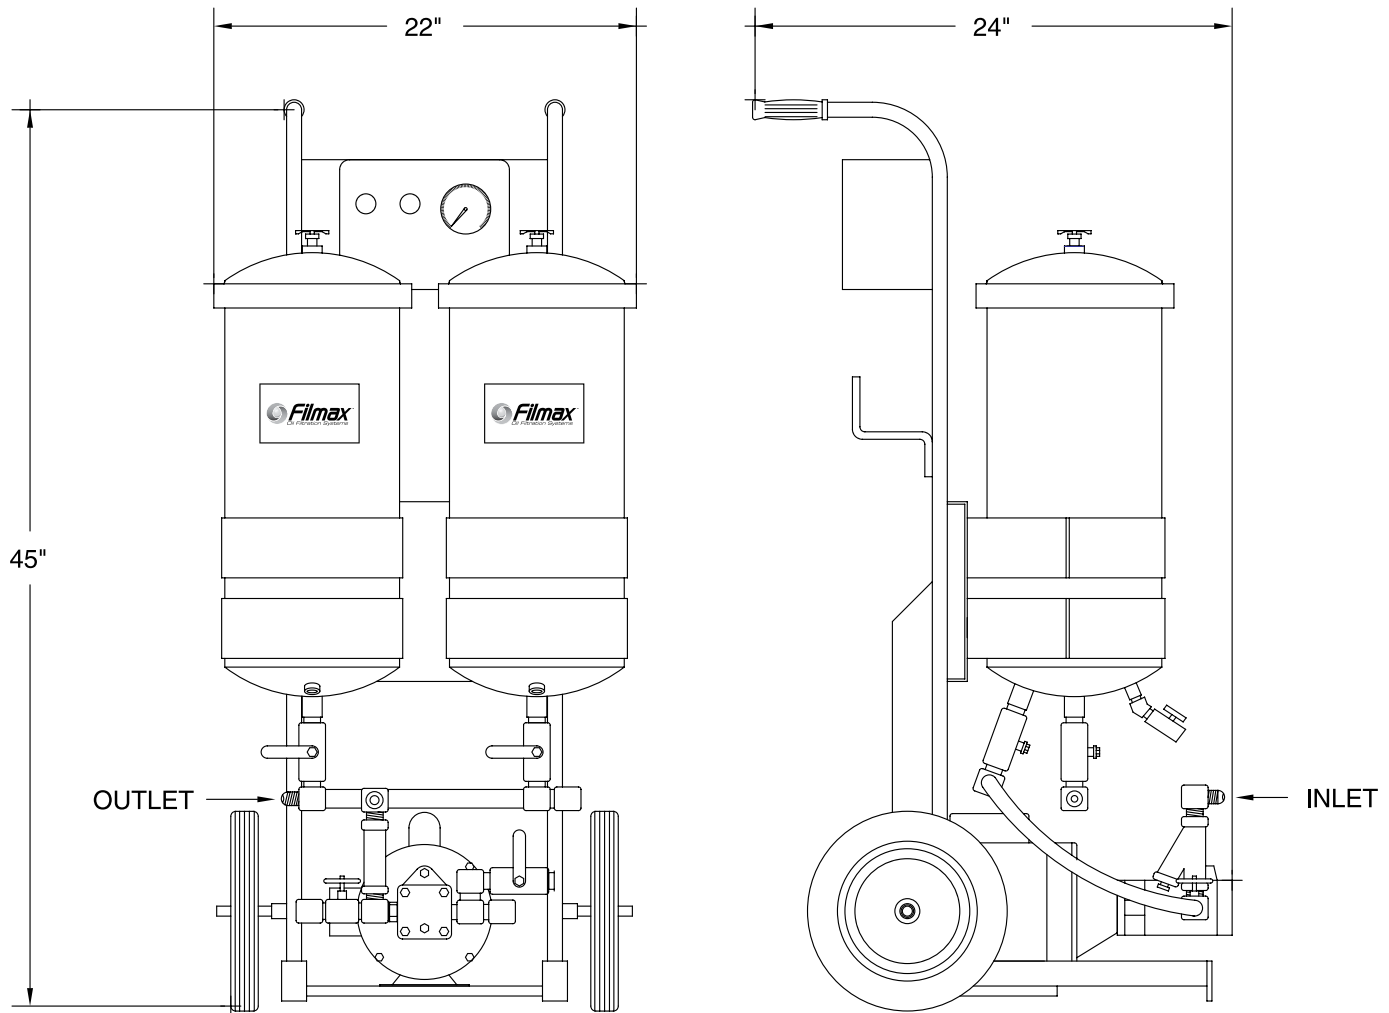

Unit Weight: 200 lbs. Shipping Weight: 260 lbs.
(weights are approximate)

Filmax, Inc. • 6775 Corporate Park Dr. • Loudon, TN 37774 • 800-321-3895 • www.filmaxinc.com

Product status and specifications are subject to change.

DISCLAIMER: Filmax reserves the right to make changes to the product(s) and or information contained herein without notice. No liability is assumed as a result of their use or application. No rights under any patent accompany the sale of any such product(s) or information.