

Facet/Purolator 12 Volt CUBE Solid State Electronic Fuel Pumps

PART#	MAX-MIN	GPH	POSITIVE LEAD	NEGATIVE LEAD	FITTING SIZE	AVERAGE LIFT	CHECK VALVE	POSITIVE SHUT-OFF VALVE	STAINLESS STEEL INTERNAL
40104	4.0 - 1.5	25	N/A	RING	1/8 - 27 INT	36"	N	N	N
40105	4.5 - 3.0	30	N/A	RING	1/8 - 27 INT	36"	N	N	N
40106	7.0 - 4.0	32	N/A	RING	1/8 - 27 INT	36"	N	N	N
40107	10.0 - 7.0	34	N/A	RING	1/8 - 27 INT	24"	N	N	N
40108	6.0 - 4.5	32	.25 BLADE	RING	3/8 FLARE	36"	N	N	N
40109	7.0 - 4.0	32	N/A	RING	3/8 - 18 INT	60"	Y	N	N
40135	7.0 - 4.0	32	PACKARD	RING	1/8 - 27 INT	36"	N	N	N
40136	7.0 - 4.0	32	PACKARD	RING	1/8 - 27 INT	36"	N	N	N
40137	7.0 - 4.0	32	PACKARD	RING	3/8 - 18 INT	60"	Y	N	N
40138	7.0 - 4.0	32	PACKARD	RING	1/8 - 27 INT	60"	Y	N	N
40147	9.0 - 4.5	32	.25 BLADE	RING	1/8 - 27 INT	60"	Y	N	N
40148	4.5 - 2.0	24	.25 BLADE	RING	1/8 - 27 INT	60"	Y	N	N
40163	2.5 - 1.5	17	.25 BLADE	RING	1/8 - 27 INT	40"	Y	N	N
40171	3.5 - 2.0	15	PACKARD	RING	1/8 - 27 INT	40"	Y	Y	N
40176	5.0 - 3.5	19	N/A	RING	1/8 - 27 INT	60"	Y	Y	N
40177	2.0 - 1.0	7	N/A	RING	1/8 - 27 INT	40"	Y	Y	N
40178	3.5 - 2.0	15	N/A	RING	1/8 - 27 INT	40"	Y	Y	N
40185	11.5 - 9.0	32	N/A	RING	1/8 - 27 INT	96"	Y	N	N
40189	5.0 - 3.5	15	AMP	RING	1/8 - 27 INT	60"	Y	Y	N
40217	3.5 - 2.0	15	BULLET	RING	1/8 - 27 INT	40"	Y	Y	N
40229	6.0 - 4.5	32	PACKARD	N/A	1/8 - 27 INT	36"	N	N	N
40231	11.5 - 9.0	25	PACKARD	N/A	1/8 - 27 INT	96"	Y	Y	N
40232	10.0 - 7.0	34	PACKARD	N/A	1/8 - 27 INT	24"	N	N	N
40241	3.5 - 2.0	15	BULLET	RING	FEMALE FLARE	40"	Y	Y	N
40250	4.5 - 3.0	32	PACKARD	RING	1/8 - 27 INT	60"	Y	N	N
40252	1.5 - 1.0	6.5	PACKARD	N/A	1/8 - 27 INT	40"	Y	Y	N
40254	4.0 - 1.5	25	N/A	RING	1/8 - 27 INT	60"	Y	N	N
40256	2.0 - 1.0	7	TYCO	MOLEX	1/8 - 27 INT	40"	Y	Y	N
40257	11.5 - 9.0	25	N/A	N/A	1/8 - 27 INT	96"	Y	Y	N
40271	4.5 - 3.0	32	PACKARD	RING	1/8 - 27 INT	60"	Y	N	N
40272	11.5 - 9.0	32	PACKARD	N/A	1/8 - 27 INT	96"	Y	N	N
40275	11.5 - 9.0	29	PACKARD	N/A	1/8 - 27 INT	96"	Y	N	N
40277	15.0 - 12.0	50	DEUTSCH	N/A	1/8 - 27 INT	96"	Y	N	N
40284	4.5 - 2.0	32	DEUTSCH	N/A	1/8 - 27 INT	60"	Y	N	N
40287	11.5 - 9.0	29	PACKARD	N/A	1/8 - 27 INT	96"	Y	N	N
40288	4.5 - 3.0	30	N/A	RING	1/8 - 27 INT	60"	Y	N	N
40289	7.0 - 4.0	30	N/A	RING	1/8 - 27 INT	60"	Y	N	N
40296	11.5 - 9.0	30	PACKARD	N/A	1/4 - 18 INT	96"	Y	N	N
40298	2.0 - 1.0	15	TYCO	RING	1/8 - 27 INT	40"	Y	Y	N
40299	15.0 - 12.0	50	PACKARD	N/A	1/8 - 27 INT	96"	Y	N	N
40300	11.5 - 9.0	30	PACKARD	N/A	1/8 - 27 INT	96"	Y	N	N
40304	15.0 - 12.0	50	DEUTSCH	N/A	1/8 - 27 INT	96"	Y	N	Y
40307	15.0 - 12.0	50	DEUTSCH	N/A	1/8 - 27 INT	96"	Y	N	N
40311	4.5 - 2.0	30	DEUTSCH	N/A	1/8 - 27 INT	60"	Y	N	Y
40313	15.0 - 12.0	50	AMP	N/A	1/8 - 27 INT	96"	Y	N	N
40314	4.5 - 2.0	28	AMP	N/A	1/8 - 27 INT	60"	Y	N	Y

Facet/Purolator 24 Volt CUBE Solid State Electronic Fuel Pumps

PART#	MAX-MIN	GPH	POSITIVE LEAD	NEGATIVE LEAD	FITTING SIZE	AVERAGE LIFT	CHECK VALVE	POSITIVE SHUT-OFF VALVE	STAINLESS STEEL INTERNAL
40151	9.0 - 4.5	32	N/A	RING	3/8 - 18 INT	36"	Y	N	N
40154	6.0 - 4.5	32	.25 BLADE	RING	3/8 FLARE	36"	N	N	N
40164	6.0 - 4.5	32	N/A	RING	1/8 - 27 INT	36"	N	N	N
40193	30	10	N/A	RING	1/4 - 18 INT	24"	N	N	N
40194	6.5 - 5.0	23	N/A	RING	1/8 - 27 INT	60"	Y	Y	N
40221	3.5 - 2.0	25	N/A	RING	1/8 - 27 INT	36"	N	N	N
40274	3.5 - 2.0	19	N/A	RING	1/8 - 27 INT	40"	Y	Y	N
40297	6.0 - 4.5	32	DEUTSCH	N/A	1/8 - 27 INT	36"	N	N	N
40317	15.0 - 12.0	50	DEUTSCH	N/A	1/8 - 27 INT	96"	Y	N	N

Facet/Purolator CUBE Solid State Electronic Fuel Pump Kits

KIT PART #	PUMP #	PACKAGING	KIT HARDWARE INCLUDES
FEP12SV	40106	FACET CLAMSHELL	(1 EA) 42804 KIT & (1 EA) FUEL FILTER 479735
FEP42SV	40104	FACET CLAMSHELL	(1 EA) 42804 KIT & (1 EA) FUEL FILTER 479735
40100	40106	FACET BOX	(1 EA) 42586 KIT = (2 EA) NUTS, BOLTS, FUEL FITTINGS
40101	40105	FACET BOX	(1 EA) 42586 KIT = (2 EA) NUTS, BOLTS, FUEL FITTINGS
40102	40104	FACET BOX	(1EA) 42586 KIT = (2 EA) NUTS, BOLTS, FUEL FITTINGS
40103	40107	FACET BOX	(1EA) 42586 KIT = (2 EA) NUTS, BOLTS, FUEL FITTINGS
40242	40105	FACET BOX	(2 EA) 41199 5/16 BARB STRAIGHT FUEL FITTINGS
40243	40106	FACET BOX	(2 EA) 41199 5/16 BARB STRAIGHT FUEL FITTINGS
40244	40107	FACET BOX	(2 EA) 41199 5/16 BARB STRAIGHT FUEL FITTINGS
40245	40104	FACET BOX	(2 EA) 41199 5/16 BARB STRAIGHT FUEL FITTINGS
40273	40272	FACET BOX	(2 EA) M16INTX1/8-27 FITTINGS & (1 EA) 42586 KIT (GMC TRUCK)



FACET®/PUROLATOR® BRANDED FUEL PUMPS ARE MANUFACTURED BY MOTOR COMPONENTS LLC AN ISO9001-2008 FACILITY
 © 2014 MOTOR COMPONENTS LLC ELMIRA HEIGHTS, NEW YORK 14903
 Phone: 607-737-8011 FAX: 607-737-8335 www.facet-purolator.com
 © Registered Trademark of MOTOR COMPONENTS LLC



ELECTRONIC FUEL PUMPS



CONSTRUCTION AND UTILITY
AUTOMOTIVE AFTERMARKET
AGRICULTURAL
GENERATORS
MARINE
MILITARY




CUBE Solid State Electronic Fuel Pumps

The best solid-state technology available for OE and Aftermarket applications. With thousands of successful applications and millions of pumps sold worldwide, these Facet/Purolator fuel pumps provide outputs to up to 132.5 liters/hour, .68 bar. Two universal models provide coverage for all low and high-pressure carburetor applications for cars, vans, RV's, light truck and diesel engines.

Features

- 12 to 86 inches dry lift...specifications vary by model
- 7 to 40 gal/hr...specifications vary by model
- 1 to 15 psi...specifications vary by model
- Transient protection
- State of the art electronics
- Sealed electronics
- ELV compliant
- Ground positive or negative
- Available in 12 or 24 volt model
- UL certified
- Internal check valve...specifications vary by model
- Reverse polarity protection
- 1.4 amp average
- Corrosion resistant over 100 hours of salt spray
- Easy 2 bolt mounting
- Meets Coast Guard Ignition Protection Test Requirements 33CFR183.410 and Fire and Thermo Shock Test Requirements 33CFR183.590
- Self-regulating pressure
- Internal anti-siphon valve (positive shut off)... specifications vary by model
- Operating temperature range -40° F to +180° F
- Compatible with gasoline, diesel, biodiesel, E85, blended alcohol and fuel additives.
- Available with stainless steel internal components.

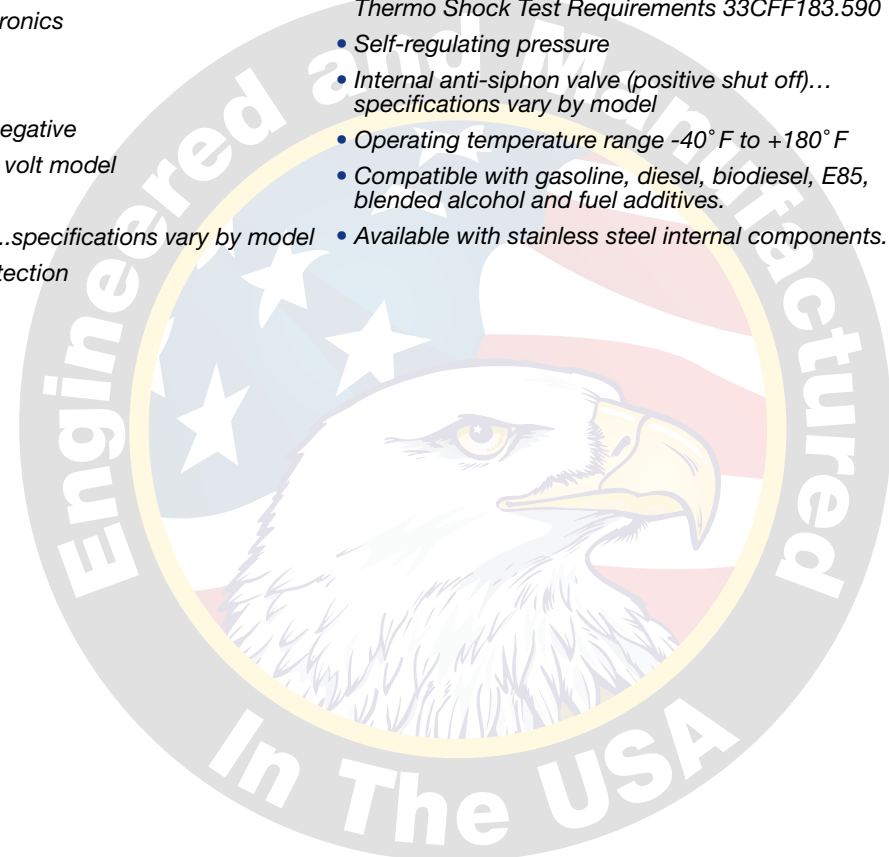



Accessories

Part #	Style	Hose barb	Thread Size	Material
Solid State Electronic Fuel Pump Accessories Fuel Fittings				
41199	STRAIGHT	5/16"	1/8-27 NPT	BRASS
42734	STRAIGHT	1/4"	1/8-27 NPT	BRASS
43040	STRAIGHT	3/8"	1/8-27 NPT	BRASS
43203	STRAIGHT	5/16"	1/8-27 NPT	NICKEL PLATE
42733	ELBOW	1/4"	1/8-27 NPT	BRASS
42774	ELBOW	3/8"	1/8-27 NPT	BRASS
479792	ELBOW	5/16"	1/8-27 NPT	BRASS
42971	SAEJ2044	N/A	1/8-27 NPT	BRASS
43121	SAEJ2044	N/A	1/8-27 NPT	NICKEL PLATE

Part #	Mounting Style	Hose barb	Thread Size	Material	For use w/	Compatible w/	Micron
Fuel Filters							
43175	EXTERNAL CLEAR	5/16"	1/8-27 NPT	POLYESTER	POSI-FLO & CUBE	GAS & DIESEL	74
43176	EXTERNAL CLEAR	1/2"	1/8-27 NPT	POLYESTER	POSI-FLO & CUBE	GAS & DIESEL	74
43177	EXTERNAL CLEAR	SAEJ2044	1/8-27 NPT	POLYESTER	POSI-FLO & CUBE	GAS & DIESEL	74
43178	EXTERNAL CLEAR	3/8"	1/8-27 NPT	POLYESTER	POSI-FLO & CUBE	GAS & DIESEL	74
43179	EXTERNAL CLEAR	5/16"	1/2-20 NPT	POLYESTER	CUBE	GAS & DIESEL	74
43180	EXTERNAL CLEAR	1/2"	1/2-20 NPT	POLYESTER	CUBE	GAS & DIESEL	74
479735	EXTERNAL STEEL	5/16"	1/8-27 NPT	POLYESTER	POSI-FLO & CUBE	GAS & DIESEL	74
FEP735	EXTERNAL STEEL	5/16"	1/8-27 NPT	POLYESTER	POSI-FLO & CUBE	GAS & DIESEL	74
42353	INTERNAL	N/A	N/A	STAINLESS STEEL	DURA-LIFT	GAS & DIESEL	80
42370	INTERNAL	N/A	N/A	POLYESTER	GOLD-FLO	GAS & DIESEL	74
479729	INTERNAL	N/A	N/A	POLYESTER	GOLD-FLO	GAS & DIESEL	74
479808	INTERNAL	N/A	N/A	POLYESTER	GOLD-FLO	GAS & DIESEL	400
FEP42370	INTERNAL	N/A	N/A	POLYESTER	GOLD-FLO	GAS & DIESEL	74

Part #	DESCRIPTION
--------	-------------

DURA-LIFT ACCESSORIES

42339	DURA-LIFT FUEL FILTER BOWL GASKET
42764	DURA-LIFT FUEL FILTER BOWL & GASKET

Part #	DESCRIPTION
--------	-------------

CUBE & POSI-FLO ACCESSORIES

41124	(1 EA) 5/16" BARBED ELBOW & (1EA) 5/16" BARBED STRAIGHT FUEL FITTINGS WITH 1/8-27 THREADS
42586	FACET BOX KIT (NUTS, BOLTS, FITTINGS)
42804	FACET CLAMSHHELL KIT (2EA) BOLTS, NUTS, (1EA) FITTING, (WITHOUT FUEL FILTER)

Part #	DESCRIPTION
--------	-------------

GOLD-FLO ACCESSORIES

41814	GOLD-FLO FUEL FILTER (200 MICRON)
41874	GOLD-FLO BOTTOM COVER
42807	GOLD-FLO COVER & WIRE KIT
478987	GOLD-FLO CABLE ASSEMBLY
479012	GOLD-FLO FUEL FILTER MAGNET
479136	GOLD-FLO FUEL FILTER GASKET

POSI-FLO® Solid State Electronic Fuel Pumps

This outstanding, lightweight universal fuel pump can be used in all carburetor equipped vehicles and also as a diesel lift pump. If "out-of-fuel" conditions occur no extended cranking is necessary to re-start the engine. In many applications, the advanced technology engineered into the Facet/Purolator® POSI-FLO® fuel pump allows for a convenient interchange with the cube fuel pump.

Features

- 12 to 60 inches dry lift...specifications vary by model
- 23 to 40 gal/hr...specifications vary by model
- 1.5 to 10psi specifications vary by model
- Internal 3.5 amp fuse
- State of the art electronics
- Sealed electronics
- Composite case housing
- Self priming and self regulating
- Corrosion resistant
- Reverse polarity protection
- Quiet running....65DB
- 1.6 amp average
- ELV compliant
- Light weight: 18 ounces at 3 inches
- Performance rated for 6000 hours
- Operating temperature range -40° F to +180° F
- Compatible with gasoline, diesel, biodiesel, E85, blended alcohol and fuel additives
- Available in 12 volt
- Internal check valve...specifications vary by model
- Transient protection
- Ground Negative

Facet/Purolator® 12 Volt POSI-FLO® Solid State Electronic Fuel Pumps

PART #	MAX-MIN	GPH	POSITIVE LEAD	NEGATIVE LEAD	FITTING SIZE	AVERAGE LIFT	CHECK VALVE	POSITIVE SHUT-OFF VALVE
60104	4.0-1.5	23	N/A	RING	1/8 - 27 INT	36"	N	N
60106	7.0-4.0	32	N/A	RING	1/8 - 27 INT	36"	N	N
60107	10.0-7.0	34	N/A	RING	1/8 - 27 INT	24"	N	N
60200	4.5 - 3	35	TYCO	RING	1/8 - 27 INT	60"	Y	N
60201	10.0 - 7.0	40	TYCO	TYCO	1/8 - 27 INT	24"	N	N
60202	10.0 - 7.0	35	PACKARD	N/A	1/8 - 27 INT	60"	Y	N
60203	10.0 - 7.0	34	PACKARD	N/A	1/8 - 27 INT	60"	Y	N
60300	4-2.5	20	N/A	RING	1/8 - 27 INT	60"	Y	N
60301	5 - 3.5	30	N/A	RING	1/8 - 27 INT	60"	Y	N
60302	7 - 5.	32	N/A	RING	1/8 - 27 INT	60"	Y	N
60303	10.0 - 7.0	34	N/A	RING	1/8 - 27 INT	60"	Y	N
60304	2.5 - 1.5	25	N/A	RING	1/8 - 27 INT	60"	Y	N

Facet/Purolator® POSI-FLO® Solid State Electronic Fuel Pump Kit

KIT PART #	PUMP #	PACKAGING	KIT HARDWARE INCLUDES
FEP04SV	60104	FACET CLAMSHHELL	(1) 42804 KIT = (2EA) NUTS, BOLTS (1EA) 41199 FUEL FITTING & 479735 FUEL FILTER
FEP06SV	60106	FACET CLAMSHHELL	(1) 42804 KIT = (2EA) NUTS, BOLTS (1EA) 41199 FUEL FITTING & 479735 FUEL FILTER
60243	60106	FACET BOX	(2 EA) 41199 5/16 BARB STRAIGHT FUEL FITTINGS
60244	60107	FACET BOX	(2 EA) 41199 5/16 BARB STRAIGHT FUEL FITTINGS
60245	60104	FACET BOX	(2 EA) 41199 5/16 BARB STRAIGHT FUEL FITTINGS

DURA-LIFT® Solid State Electronic Fuel Pumps

A tough, hard working fuel pump for diesel transfer applications for truck refrigeration units, marine generator sets, diesel filtration systems, industrial and other diesel or gasoline lift applications. The Facet® Dura-Lift® fuel pump provides up to 125 liters/hour, .76 bar. In thousands of proven on-the-job uses, these pumps have earned the reputation to wear the name... Facet®. Available in 12 or 24 volt models.

Features

- Self-priming to 120 inches dry lift
- 33 gal/hr
- 9 to 15 psi...specifications vary by model
- 4 hour dry run
- Available in 12 or 24 volt model
- State of the art electronics
- Sealed electronics
- Self-regulating pressure
- VCA approved EC95/54
- 80 micron stainless steel filter
- Transient protection
- Reverse polarity protection
- Available with internal stainless steel components
- Light-Weight: 3 lbs at 7 1/4 inches
- Corrosion resistant over 100 hours salt spray
- Easy 2 bolt mounting
- Transparent fuel filter bowl allows filter monitoring
- Low power requirements 1.4 amp on average
- Internal check valve
- ELV compliant
- Ground positive or negative
- Compatible with gasoline, diesel, biodiesel, E85, blended alcohol and fuel additives
- Operating temperature range -40° F to +180° F

Facet® 12 Volt DURA-LIFT Solid State Electronic Fuel Pumps

PART#	MAX-MIN	GPH	VOLTS	CONNECTOR	FITTING SIZE	LIFT MIN DRY	CHECK VALVE	POSITIVE SHUT-OFF VALVE	STAINLESS STEEL INTERNAL
40222	11.5-9.0	33	12	N/A	1/8 - 27 INT	120"	Y	N	N
40223	11.5-9.0	33	12	PACKARD	1/8 - 27 INT	120"	Y	N	N
40285	7 - 4.	33	12	PACKARD	1/8 - 27 INT	120"	Y	N	N
40290	15-12	50	12	PACKARD	1/8 - 27 INT	50"	Y	N	N
40295	11.5-9.0	33	12	PACKARD	1/8 - 27 INT	50"	Y	N	Y
40303	6.25 - 4.25	33	12	N/A	1/8 - 27 INT	50"	Y	N	Y
40321	8.5 - 6.5	33	12	PACKARD	1/8 - 27 INT	50"	Y	N	Y

Facet® 24 Volt DURA-LIFT Solid State Electronic Fuel Pumps

40237	11.5-9.0	33	24	N/A	1/8 - 27 INT	120"	Y	N	N
40319	15.0 - 12.0	50	24	DEUTSCH	1/8 - 27 INT	50"	Y	N	N

High Performance GOLD-FLO® Solid State Electronic Fuel Pumps

An industry standard for over 60 years, these lightweight compact pumps can be found in almost every conceivable application. With out-put ranges up to 170.3 liters/hour, .68 bar, these gasoline or diesel fuel pumps provide high-performance output for everything from racing cars to heavy duty agricultural and construction machinery. Available in 12 or 24 volt models.

Features

- 12 to 24 inches dry lift...specifications vary by model
- 20 to 45 gal/hr...specifications vary by model
- 1.0 to 8.0 psi...specifications vary by model
- Available in 12 or 24 volt model
- Transient protection...24 volt only
- State of the art electronics
- Sealed electronics
- VCA certified
- Mil-Std-62678 tested
- Complies to Mil-Std 461D...specifications vary by model
- Replaceable 74 micron filter
- 1.6 amp average
- Self priming and self regulating pressure
- Lightweight ...32 ounces at 5 inches in length
- ELV compliant
- Easy 2 bolt mounting
- Ground negative
- Corrosion resistant over 100 hours of salt spray
- Built in magnet to collect metal particles for additional filtration
- Meets Coast Guard Ignition Protection Test Requirements 33CFR183.410 and Thermo Shock Test Requirements 33CFR183.590
- Operating temperature range -40° F to +180° F
- Compatible with gasoline, diesel, biodiesel, E85, blended alcohol and fuel additives.

Facet/Purolator® High Performance 12 Volt Gold-Flo® Solid State Electronic Fuel Pumps

PART #	MAX-MIN	GPH	POSITIVE LEAD	FITTING SIZE	LIFT MIN. DRY	FUEL FILTER	CHECK VALVE	POSITIVE SHUT-OFF VALVE
40002E	4.0-2.75	34	N/A	1/8 - 27 INT	24"	74U	N	Y
40007E	5.5-4.0	36	N/A	1/4 - 18 INT	24"	74U	N	N
40051E	8.0-6.0	32	N/A	1/8 - 27 INT	24"	74U	N	Y
40131E	5.5-4.0	34	N/A	1/8 - 27 INT	24"	74U	N	Y
40133E	5.5-4.0	34	N/A	1/8 - 27 INT	24"	N/A	N	Y
40159E	8 MIN	23	N/A	1/8 - 27 INT	48"	200U	Y	N
40220E	5.5-4.0	36	AMP	1/4 - 18 INT	24"	400U	N	N
476087E	5.5-4.0	36	N/A	1/8 - 27 INT	24"	74U	N	N
476459E	8.0 - 6.5	32	N/A	1/8 - 27 INT	24"	74U	N	N
477060E	4.0-2.75	34	N/A	1/8 - 27 INT	24"	74U	N	N
478360E	5.5-4.0	36	N/A	1/8 - 27 INT	24"	74U	N	N
480516E	5.5-4.0	36	PACKARD	1/8 - 27 INT	24"	74U	N	N
480532E	8.0-6.5	45	N/A	1/4 - 18 INT	24"	74U	N	N
480534E	8.0-6.0	45	N/A	1/4 - 18 INT	24"	400U	N	N
480543E	8.0-6.0	45	N/A	1/4 - 18 EXT	24"	74U	N	N

Facet/Purolator® High Performance 24 Volt Gold-Flo® Solid State Electronic Fuel Pumps

40010E	8.0-6.0	33	PACKARD	1/8 - 27 INT	24"	74U	N	N
40053E	5.5-4.0	32	BULLET	1/8 - 27 INT	24"	400U	N	N
40128E	8.0-6.0	33	EMI FILTER	1/4 - 18 EXT	24"	74U	N	Y
40251E	5.0-4.0	32	PACKARD	1/8 - 27 INT	24"	74U	N	N
40255E	7.0-4.0	32	PACKARD	1/8 - 27 INT	24"	74U	N	N
40258E	4.0-2.5	32	EMI FILTER	1/8 - 27 INT	24"	74U	N	N
476088E	5.0-4.0	32	N/A	1/8 - 27 INT	24"	74U	N	N
477003E	8.0-6.0	30	N/A	1/8 - 27 INT	24"	74U	N	N
477883E	5.0-4.0	32	EMI FILTER	1/8 - 27 INT	24"	74U	N	N
480509E	8.0-6.0	33	EMI FILTER	1/8 - 27 INT	12"	74U	N	N
480517E	8.0-6.0	33	EMI FILTER	1/4 - 18 EXT	24"	74U	N	N
480563E	8.0-6.0	33	N/A	1/4 - 18 INT	24"	74U	N	Y
480564E	5.0-4.0	32	N/A	1/4 - 18 INT	24"	74U	N	Y

Facet/Purolator® Gold-Flo® Solid State Electronic Fuel Pump Kits

KIT PART #	PUMP #	PACKAGING	KIT HARDWARE INCLUDES
FEP59SV	476459E	FACET: CLAMSHHELL	(2EA) ELBOW FITTINGS, NUTS, SCREWS
FEP60SV	477060E	FACET: CLAMSHHELL	(2EA) ELBOW FITTINGS, NUTS, SCREWS
FEP87SV	476087E	FACET: CLAMSHHELL	(2EA) ELBOW FITTINGS, NUTS, SCREWS
40261	476087E	FACET: BOX	(2EA) ELBOW FITTINGS, NUTS, SCREWS
40262	476459E	FACET: BOX	(2EA) ELBOW FITTINGS, NUTS, SCREWS
40263	477060E	FACET: BOX	(2EA) ELBOW FITTINGS, NUTS, SCREWS

WE MOVE FUEL®